


24/7 ASSET MONITORING SOLUTION ENERGY

HTR02 SPECIFICATIONS

SENSeOR (head office)

Le Navigator - Bâtiment B
505, route des Lucioles
06560 Valbonne
Sophia-Antipolis
France

Contact address:
sales@senseor.com

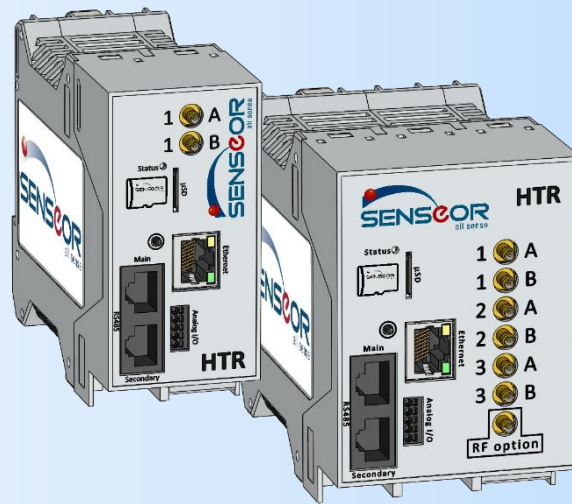

Regional distributors

Visit www.senseor.com for the latest distribution locations.



ISO 9001:2015

BUREAU VERITAS
Certification



APPLICATION

This datasheet describes the specifications of the *HTR02 Radio-Frequency transceiver*. Configured with SAW sensors and partial discharge probe antennas, this last generation of transceiver is designed for the *SENSeOR* temperature and partial discharge monitoring system.


This transceiver has been designed specifically to measure inside a switchgear cubicle and operation under high current and voltage.

This datasheet covers the following products:

- **HTR02-2AWS:** Temperature monitoring using one antenna pair.
- **HTR02-6AWS:** Temperature monitoring using up to three antenna pairs.
- **HTR02-6AWS-PDD:** Temperature and partial discharge monitoring using up to three antenna pairs.

FIXATION MODES

The transceiver can be mounted on standard 35 mm DIN rail.

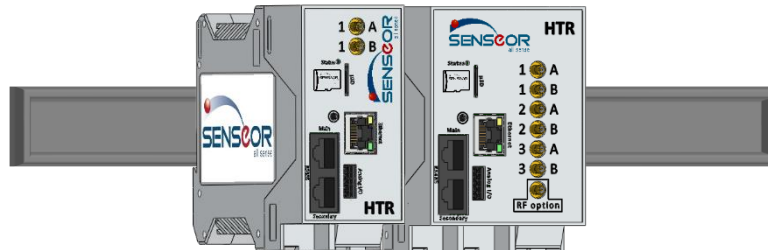

SPECIFICATIONS


HTR02 TRANSCEIVER

Product references	HTR02-2AWS (temperature monitoring only) HTR02-6AWS (temperature monitoring only) HTR02-6AWS-PDD (temperature and partial discharge monitoring)
Number of antenna pairs	1 for HTR02-2AWS, 3 for HTR02-6AWS(-PDD)
RF connectors	Male SMB
Number of configurable SAW sensors	6 for HTR02-2AWS, 18 for HTR02-6AWS(-PDD)
Number of configurable probe antennas	Up to 3 (only for HTR02-6AWS-PDD)
Configurable analog inputs/outputs	1 input (4-20 mA) 1 output (4-20 mA and 0-10 V)
Configurable digital output	1 relay activation (0-24 VDC – 200 mA)
Communication interfaces	RS485 (Modbus-RTU) on 2 female RJ45 connectors Ethernet (Modbus-TCP, SENSEOR proprietary for configuration) on female RJ45 connector (10 Mb)
Remote configuration	Using <i>SENSeOR Configuration Tool</i> (firmware upgradable)
External probes	Ambient temperature and humidity BHT II – D/I device
Data storage	µSD card reader
Operating frequency range	From 430 to 450 MHz (depending on sensor reference)
Operating temperature range	From -20 to +70°C
Display	Multicolor status led
Alarm acknowledgement	Pushbutton
Ingress protection code	IP20
Operating power	24 VDC typical (from 12 to 36 VDC) 200 mA for HTR02-2AWS 250 mA for HTR02-6AWS(-PDD)
Dimensions	45 x 99 x 117 mm for HTR02-2AWS 68 x 99 x 117 mm for HTR02-6AWS(-PDD)
Weight	170 g for HTR02-2AWS, 270 g for HTR02-6AWS(-PDD)
Fixation mode	35 mm DIN rail
Certifications	RoHS 2011/65/EU and 2015/863/EU IEC 62271-1: Switchgear, CISPR11 IEC 61000-4-2, IEC 61000-4-4, IEC 61000-4-17 IEC 61000-4-18, IEC 61000-4-29 IEC 60068-2-1, IEC 60068-2-2, IEC 60068-2-6, IEC 60068-2-30 IEC 60068-2-6, IEC 60068-2-78 IEC 60255-21-1, IEC 60255-21-3 IEC 61010-1 CEPRI-EETC06-2019-0023 / CCAM19LP1860T6
Marking	File number: E510280 – Measuring Equipment




Measuring Equipment
E510280

PRODUCT LABEL

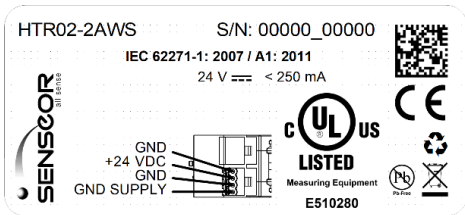


HTR02-2AWS signage label

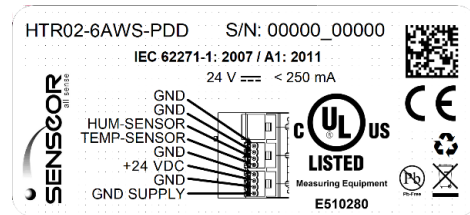


HTR02-6AWS signage label


PHYSICAL DIMENSIONS

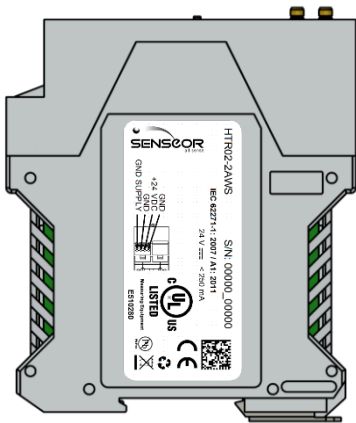


HTR02-2AWS side view

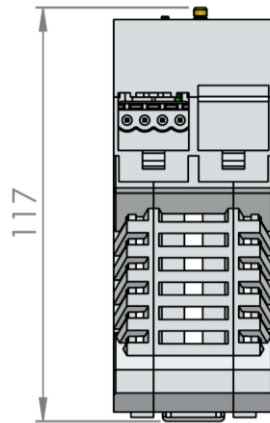


HTR02-2AWS bottom view

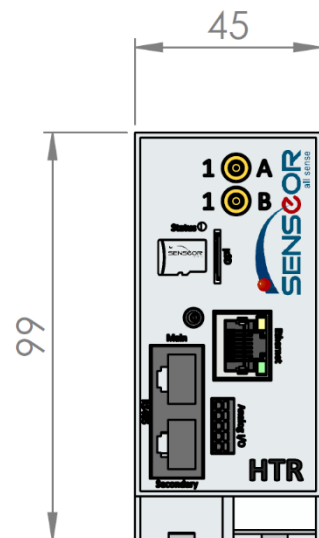


HTR02-2AWS front view

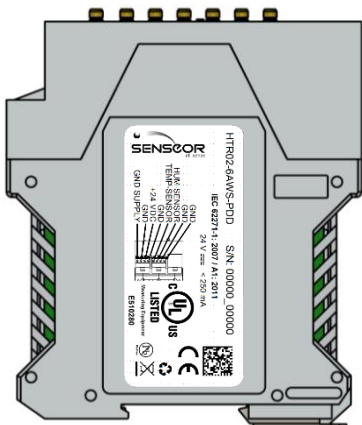

HTR02-6AWS(-PDD) side view

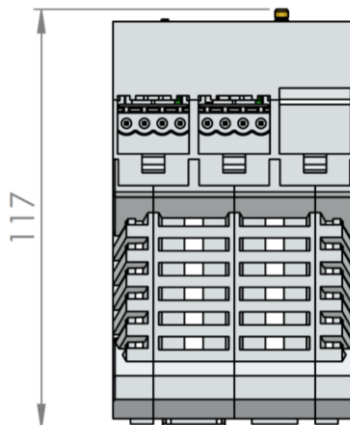

HTR02-6AWS(-PDD) bottom view

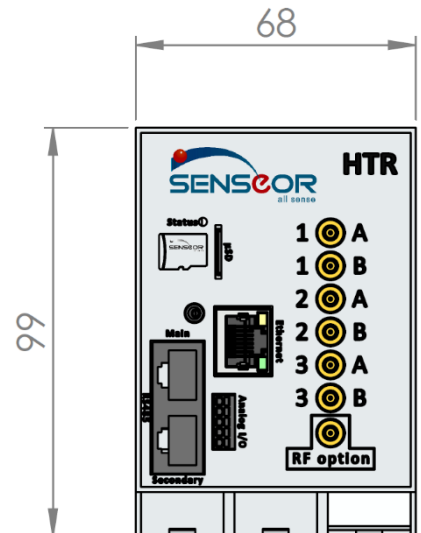

HTR02-6AWS(-PDD) front view

SENSeOR reserves the right to make technical changes or to modify the content of this document without prior notice.
SENSeOR is not responsible for errors or for possible lack of information in this document.